


FLUKE[®]

**Process
Instruments**

Thermalert[®] 4.0 Series

Infrared Pyrometers

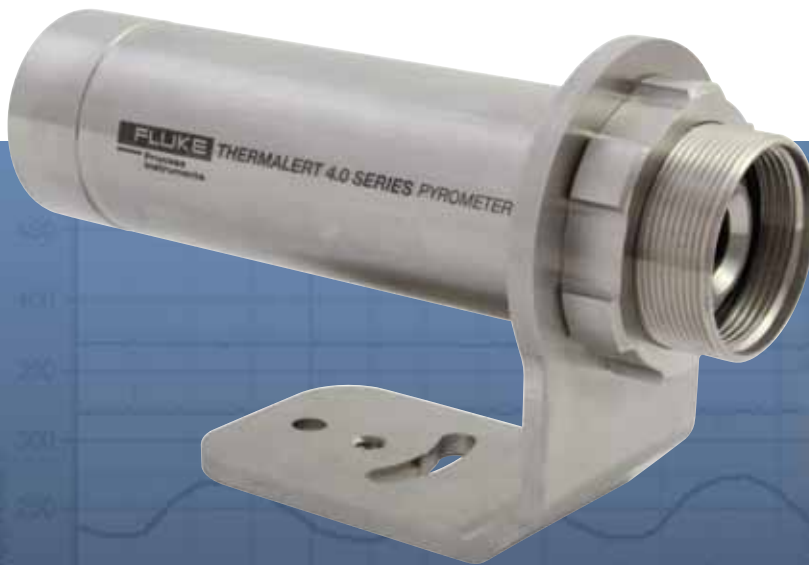

131°C
320°C
269°C

Temperature

2.250°C
4,082°F





1.370°C
2,498°F

Strong

Reliable

Diverse

300°C
572°F

Thermalert	LT	G5	G7
<p>The Thermalert is the smart integrated sensor designed for accurate temperature measurement with best in class performance for factory automation needs.</p> <p>Available as plug & play into any type of environmental situation.</p>	<p>-40 to 1000 °C (-40 to 1832 °F)</p> <p>8 to 14 μm</p> <p>up to 70:1</p> <p>Low temperature applications, such as thick plastics, asphalt, carpeting, coated paper, thermoforming and food</p>	<p>250 to 2250 °C (482 to 4082 °F)</p> <p>5 μm</p> <p>up to 70:1</p> <p>Glass surface temperature for bending, tempering, annealing and sealing</p>	<p>300 to 900 °C (572 to 1652 °F)</p> <p>7.9 μm</p> <p>up to 70:1</p> <p>Ultra-thin drawn glass</p>
			

The strong, reliable, diverse solution... saving you time and money



Strong

Built for use in harshest environments, the Thermalert sensor withstands ambient temperatures up to 85 °C (185 °F) without extra cooling. The sensor supports many wavelengths and can be used for a broad range of application.

Reliable

Designed to handle wider temperature ranges this sensore comes with superior in class optical resolution. 2 wire loop powered RS-485 and analog output are available to meet your process requirements. Galvanic insulation ensures correct readings.

Diverse

- Sensors are rugged, small and easy to install.
- Laser sighting available for all instruments
- Backward compatibility to old Raytek and Ircon in class sensors and accessories
- Broad range of accessories available (high temperature enclosures, cables,...)
- 2-year warranty

The Thermalert 4.0 series of integrated sensors provide accurate temperature measurement for a wide variety of process control applications. With various types of communications, the Thermalert 4.0 sensor with laser aiming, provides the features you need to control your process in a compact, integrated package that is easy to install and operate. Now, that's one strong, reliable and diverse sensor.







Thermalert 4.0 with 12 pin connector supporting comprehensive input/output capabilities



Thermalert 4.0 supports 2 wire loop for simultaneous power supply and analog output





Thermalert 4.0 with 6 pin terminal providing analog out and RS-485 communications

P3	P7	MT	HT
25 to 450 °C (77 to 842 °F)	10 to 360 °C (50 to 680 °F)	200 to 2250 °C (842 to 4082 °F)	500 to 2000 °C (932 to 3632 °F)
3.43 µm	7.9 µm	3.9 µm	2.2 µm
20:1	33:1	up to 70:1	60:1
Extrusion and converting of thin films like polyethylene, polypropylene, and polystyrene thin films	Production and converting of films of polyester (PET), fluoroplastic, Teflon®, acrylic, nylon (polyamide), polyurethane, PVC	Furnace refractory, flame hardening and brazing	Ferrous and nonferrous metals, induction heating, furnaces, laboratory research
			

Software

DataTemp Multidrop software provides you with the tools you need to configure your sensors - then monitor temperatures on a real-time graphical display. The bar graph feature shows temperature profiles across a web or at various spots along a process. Use the program to record and archive your process temperatures. High and low alarms are shown, making it easy to identify out of range conditions.

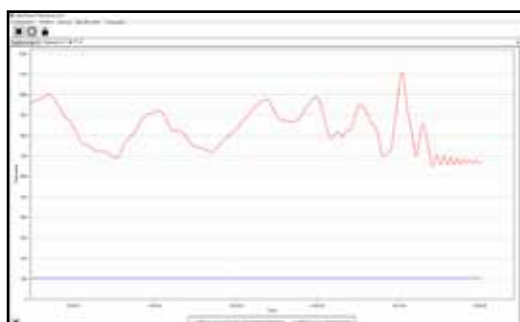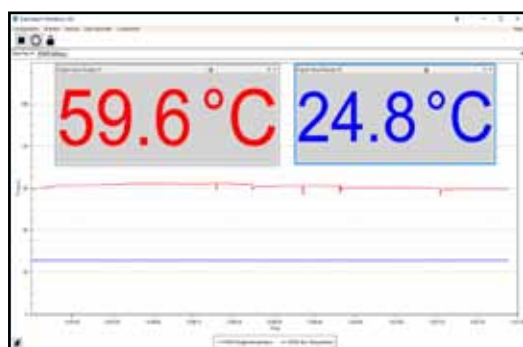

Accessories

A wide variety of options and accessories are available to customize the installation of your Thermalert 4.0 sensors.

Lens protectors and air purge collars offer protection in harsh environments. The water-/air-cooled housings can be specified for operation in ambient temperatures up to 175 °C (315 °F).



For extremely harsh environments, the ThermoJacket is recommended.

This rugged cast aluminum housing protects the sensors in ambient temperatures to 315 °C (600 °F). It completely encloses the sensor, combining thermal and mechanical protection with air purging of the lens. The Thermalert 4.0 sensor can be installed or removed while the ThermoJacket is in its mounted position.



The ThermoJacket protective enclosure enables use in ambient temperatures up to 315 °C (600 °F).

Key Features

- Durable stainless steel IP65 / NEMA4 enclosures designed to withstand ambient temperatures from -20 °C to 85 °C (-4 °F to 185 °F)
- Integrated laser sighting
- Galvanic isolated outputs
- Plastic lens option for food application
- Analog input for ambient compensation and adjusting emissivity setting
- Multiple interfaces
 - 2-wire loop powered for simultaneous analog and digital communication
 - 12 wires M16 and 6-pins terminal block for digital communication (RS485)
- USB for easy setup
- Simple, two-wire or digital installation
- Wide temperature ranges from -40 °C to 2250 °C (-40 °F to 4082 °F)
- Advanced signal processing
- Wide choice of focus distances

Compatibilities

Easy to upgrade from your existing Raytek TX, XR or Marathon and Ircon Modline 4 or 7 series installations. Direct fitting in old installation or adapter accessories and patch cables allow you to use existing accessories.

The Fluke Process Instruments Guarantee

The Thermalert 4.0 Series is supported by a 2 year warranty. With a network of trained representatives and agents in over one hundred countries and offices located in the U.S., Germany and China, we provide local service and support.

Fluke Process Instruments

Americas

Everett, WA USA
Tel: +1 800 227 8074 (USA and Canada, only)
+1 425 446 6300
solutions@flukeprocessinstruments.com

EMEA


Berlin, Germany
Tel: +49 30 4 78 00 80
info@flukeprocessinstruments.de

China

Beijing, China
Tel: +8610 6438 4691
info@flukeprocessinstruments.cn

Japan

Tokyo, Japan
Tel: +81 03 6714 3114
info@flukeprocessinstruments.jp



In the heat of the moment, what is the temperature? Not knowing can mean the investment and labor of everyone and every material involved in the manufacturing process, from the raw to the finished product, is at risk. We take the heat and tell you its temperature. Precisely, accurately, and with the greatest of detail, all to ensure our customers' promise of quality is delivered.

We are Raytek, Ircon, and Datapaq. Combined, we have over 150 years of experience in temperature measurement. Individually, we have earned the respect of manufacturing's most valued names.

Together, we are Fluke® Process Instruments - a triad of the top performing, innovative, most rugged and dependable noncontact temperature measurement and profiling equipment made - a complete line of infrared sensors, line scanners, thermal imagers and profiling systems for use in today's most demanding environments.

Raytek, Ircon, and Datapaq. The first names in temperature control have become the last word in manufacturing with confidence:

Fluke Process Instruments

Asia East and South

India Tel: +91 22 62495028
Singapore Tel: +65 6799 5578
sales.asia@flukeprocessinstruments.com

Worldwide Service

Fluke Process Instruments offers services, including repair and calibration. For more information, contact your local office.

www.flukeprocessinstruments.com

© 2018 Fluke Process Instruments
Specifications subject to change without notice.
3/2018 6010791A

